Heavy Duty Spring Retractable Hose Reels

Air/Water/Oil/Grease - 1/4", 3/8", 1/2" I.D.

Reelcraft's new compact dual pedestal Series DP5000 and DP7000 feature an innovative, non-welded, interlocking base. Independent testing to military standards has proven the reel stand up to heavy vibration, which makes them especially strong and ideal for truck-mounted applications. Superbly engineered dual pedestal base and guide arm are structurally reinforced. All-steel construction and a baked-on powder coat finish combine to produce a rugged corrosion-resistant product suitable for a wide variety of heavy duty applications.

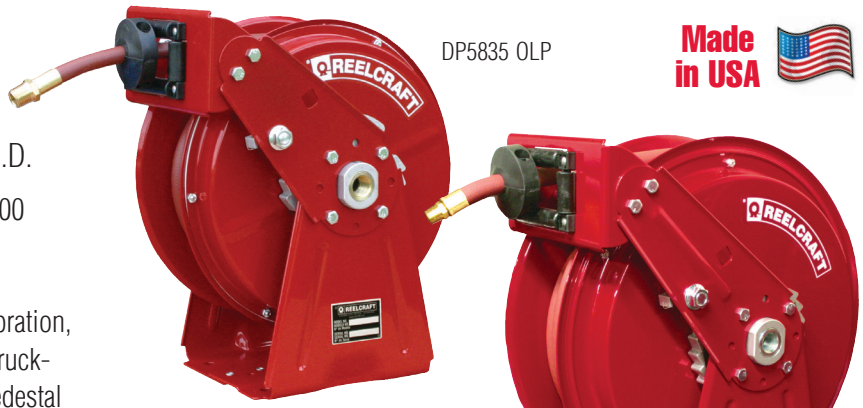

DP5835 OLP

DP7850 OLP

Made in USA

Meets or exceeds military vibration for Truck Transport test

MIL-STD-810F

500,000 mile equivalent

- ✓ **Superior corrosion-resistance** A double adhesive gasket seals the spring case.
- ✓ **Ease of operation** - The latch pawl is mounted on the guide arm to prevent latch out at full extension.

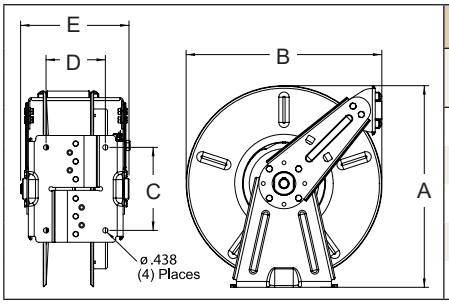

Dimensions - Size Index	1		2		3		4	
	in	mm	in	mm	in	mm	in	mm
A	16 3/8	416	16 3/8	416	17	432	17	432
B	14 3/8	365	14 3/8	365	16 1/2	419	16 1/2	419
C	7	178	7	178	7	178	7	178
D	4	102	5	127	4	102	5	127
E	8	203	9	229	8	203	9	229

Model with Hose	Shipping Weight		Hose I.D.		Hose O.D.		Hose Length		**Max Pressure		NPT(M) Hose Outlet	NPT(F) Reel Inlet	Model without hose & bumper	Shipping Weight		Pressure		Size Index #
	lbs	kg	in	mm	in	mm	ft	m	psi	bar	in	in		lbs	kg	psi	bar	
Low Pressure Air/Water Reels	Maximum temperature 150 °F (65 °C) w/hose / 210 °F (99 °C) w/o hose								**Maximum working pressure at 70 °F (20 °C)									
DP5435 OLP	34	15	1/4	6	.475	12	35	11	300	21	1/4	1/2	**DP5400 OLP**	29	13	500	35	1
DP5450 OLP	37	17	1/4	6	.475	12	50	15	300	21	1/4	1/2	**DP5400 OLP**	29	13	500	35	1
DP7450 OLP	46	21	1/4	6	.475	12	50	15	300	21	1/4	1/2	**DP7400 OLP**	44	20	500	35	3
DP5635 OLP	41	19	3/8	10	.600	15	35	11	300	21	1/4	1/2	**DP5600 OLP**	37	17	500	35	1
DP5650 OLP QS	44	20	3/8	10	.600	15	50	15	300	21	1/4	1/2	**DP5605 OLP**	38	17	500	35	2
DP7650 OLP QS	50	23	3/8	10	.600	15	50	15	300	21	1/4	1/2	**DP7600 OLP**	44	20	500	35	3
DP5835 OLP	52	24	1/2	13	.750	19	35	11	300	21	3/8	1/2	**DP5800 OLP**	38	17	500	35	2
DP7850 OLP QS	53	24	1/2	13	.750	19	50	15	300	21	3/8	1/2	**DP7800 OLP**	45	20	500	35	4
DP7850 OLP121	53	24	1/2	13	.750	19	50	15	300	21	1/2	1/2	**DP7800 OLP**	45	20	500	35	4
Medium Pressure Oil Reels	Maximum temperature 210 °F (99 °C)																	
DP7650 OMP	55	25	3/8	10	.690	18	50	15	2600	179	3/8	1/2	**DP7600 OMP**	45	20	3000	207	3
DP5835 OMP	54	24	1/2	13	.820	21	35	11	3000	207	1/2	1/2	**DP5800 OMP**	40	18	3000	207	2
DP7850 OMP QS	64	29	1/2	13	.820	21	50	15	3000	207	1/2	1/2	**DP7800 OMP**	45	20	3000	207	4
High Pressure Grease Reels	Maximum temperature 210 °F (99 °C)																	
DP7450 OHP	59	27	1/4	6	.580	15	50	15	5000	345	1/4	1/2	**DP7400 OHP**	44	20	5000	345	3
DP5635 OHP	43	20	3/8	10	.730	19	35	11	4800	331	3/8	1/2	**DP5600 OHP**	40	18	5000	345	2
DP7650 OHP CA	65	29	3/8	10	.730	19	50	15	4800	331	1/4	1/2	**DP7600 OHP**	46	21	5000	345	3

Low pressure reels furnished standard with PVC hose. Medium pressure reels furnished standard with S.A.E. 100R1-AT (3/8") or S.A.E. 100R17 (1/2") one wire braid hose. High pressure reels furnished standard with S.A.E. 100 R2T two wire braid hose. Reference page 4 for guide arm positions.

Models listed with an icon can ship same day upon request when the order is received by 1:00 PM Eastern Time for quantities of 10 or fewer.

IN Indiana Warehouse

CA California Warehouse

QS Indiana & California Warehouses

Canadian Warehouse

Interactive Reel Catalog

Visit **www.reelcraft.com/catalog** for complete product specifications, available parts and accessories.

Prop 65: ⚠ **WARNING:** Cancer and Reproductive Harm www.P65Warnings.ca.gov.