



HYDRAULIC DRIVEN AIR COMPRESSORS

THE SMARTEST, SMALLEST AND MOST POWERFUL HYDRAULIC AIR COMPRESSOR AVAILABLE.



H40 & H60

“One of the major concerns for customers who purchase our smaller 19,500 GVW 7-series truck body is weight. In order to address this, we’ve made it our goal to reduce the weight of our body and accessories. We have saved almost 260 lbs when installing the VMAC H40 hydraulic driven air compressor instead of the competitor’s comparable air compressor, allowing techs to carry more tools and supplies needed to get their jobs done.”
- Sondra Kirby, Part Sales
Summit Truck Bodies

UP TO 60 CFM. 100% OF THE TIME.

VMAC Hydraulic air compressors use patented rotary screw technology that can operate intermittently for smaller jobs but are designed to maintain 100% of the specified CFM so operators don’t have to wait for their air compressor to fill up an air receiver tank. This maximizes air tool performance and eliminates downtime. Two models provide compressed air ranging from 25 to 60 CFM.


DECREASE TRUCK GVW BY UP TO 260 LBS

VMAC Hydraulic air compressors reduce truck GVW by as much as 260 lbs. This is because VMAC designs systems with lightweight materials and integrated components. Choosing a lightweight air compressor means you’ll be able to add more tools and equipment to your truck, carry more materials, or take advantage of better fuel economy.

FREE UP TO 8 FT³ ON YOUR TRUCK BODY

VMAC Hydraulic air compressors free up to 8 cubic feet on the truck deck. Systems are designed and engineered to be compact for service trucks and applications where space is limited.



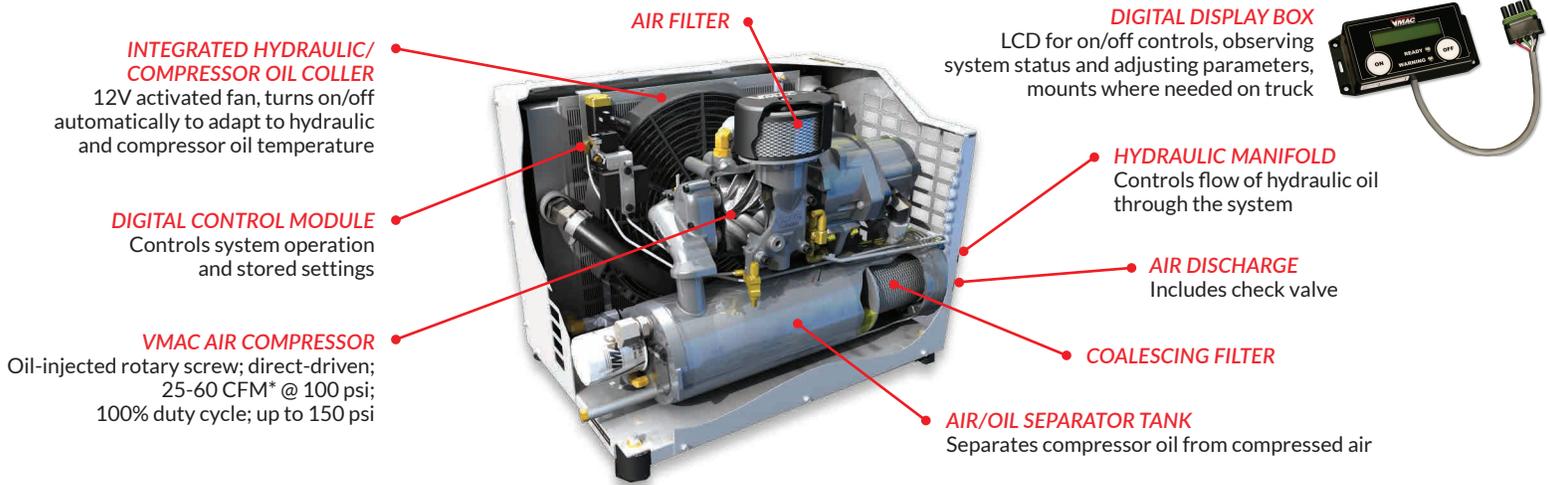

SPECIFICATIONS

H40

H60

Air Compressor Output	25-40 CFM* @ up to 150 psi	40-60 CFM* @ up to 150 psi
Air Compressor Type	Direct-driven, 100% duty cycle, VMAC oil-injected rotary screw	
Weight (dry)	Approximately 150 lbs (68 kg)	Approximately 160 lbs (73 kg)
Dimensions	24.0" (l) x 16.5" (w) x 18.0" (h) / 61.0 cm (l) x 41.9 cm (w) x 45.7 cm (h)	
Hydraulic Flow Required	9-12 GPM (34-46 LPM); open center hydraulic circuit	14-21 GPM (53-80 LPM); open center hydraulic circuit
Hydraulic Pressure at Full Load (Hydraulic pump recommended)	2,345 psi (162 bar); 3,000 psi (207 bar)	2,450 psi (169 bar); 3,000 psi (207 bar)
Cooler	Integrated hydraulic/compressor oil cooler	
Hydraulic Connections	#12 ORB Inlet, #16 ORB Outlet	
Control System	<ul style="list-style-type: none"> > LCD digital display box with hour meter, service reminders, and error messages > Live monitoring of air pressure, hydraulic and compressor temperatures > Automatic warm-up mode, soft-start > Standby Mode, turns system off and on automatically depending on air use 	
Safety System	<ul style="list-style-type: none"> > Compressor/Hydraulic overheat protection > Cooler bypass check valve > Overpressure shutdown > Automatic rapid blow-down valve on tank > 200 psi air pressure relief valve > Automatic cold climate protection 	
Air Receiver Tank	(recommended not included)	Minimum 6-Gallon Air Receiver Tank - Recommended for proper operation of all functions.
Warranty		Two years on all major components; VMAC air-ends are covered by VMAC's Lifetime Limited Warranty

OPTIONAL ACCESSORIES

MOUNTING BRACKETS

A700140
Allows for an easier more rigid installation



COLD CLIMATE MANIFOLD

A700146
Fully automated manifold heater block; recommended for extreme cold climates (-15°C/5°F)



CLOSED CENTER MANIFOLD

A700190/191
Required for Variable Displacement (Closed-Center) Hydraulic Circuits



HYDRAULIC OIL COOLER

A850001
12V activated cooler; recommended for high duty cycle applications in extreme hot climates (+37°C/100°F)



VMAC DEALER INFORMATION:

VMAC
AIR INNOVATED

T: 250-740-3200 | Toll Free: 1-877-912-6605 | Fax: 250-740-3201
E: sales@vmacair.com | www.VMACAIR.com